

Features




Features

- 10dB Right-Hand Circular Polarized antenna
- 2400-2500 MHz
- Beamwidth: 60°
- Front-to-back ratio: > 15dB

Note: The AD2500-10-RP uses a custom cable and connector to attach to the EAGLE PLUS transmitter. Its specifications are otherwise identical to the AD2500-10-R.

Technical Specifications

Freq. Range (MHz)	-3dB Beamwidth (E and H plane)
2400-2500	45° (min.), 60° (typ.)
Axial Ratio	Gain (dBi)
4 (max.)	8 (min.), 10 (typ.)
Weight (oz.)	Front to Back (dB)
4	> 15
Cross Polarization	
10 dB (min.)	
Bandwidth	
2450±75 MHz, 14 dB R.L. (typ.)	


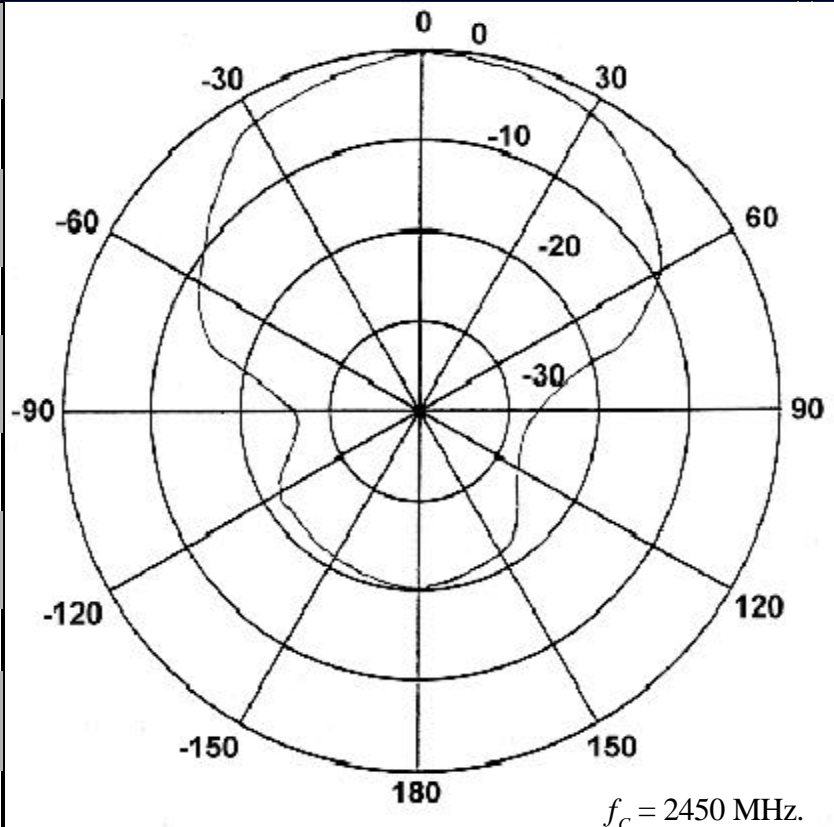


Made in the USA. All specifications subject to change without notice.

© Trango Systems.

All rights reserved.

Mechanical Dimensions

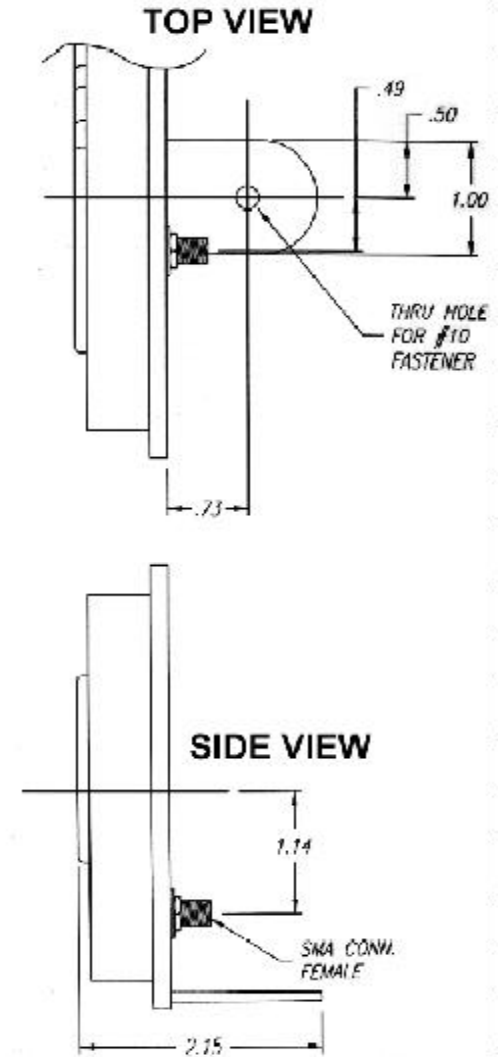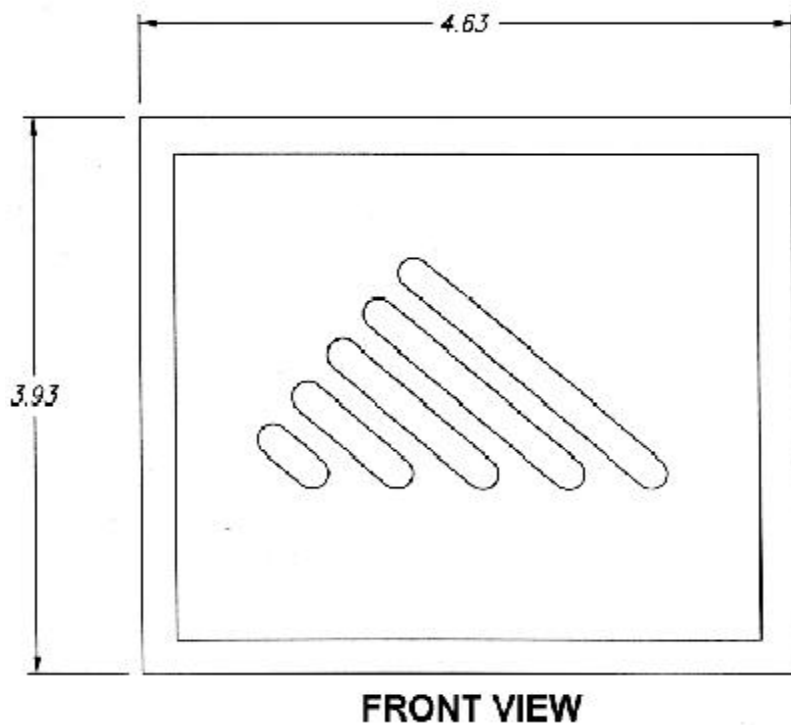

Mounting

The AD2500-10-R comes with an SMA cable and can be mounted to a wall with an "L-brace." Suggested source of supply for the L-brace is McMaster Carr, part number 15275A51. The AD2500-10-R and L-brace can be secured with a #10 screw and nut.

The AD2500-10-RP comes with a custom connector and cable to connect to the EAGLE PLUS transmitter.

The AD2500-10-R cover is an ABS weatherproof material that lends itself to outdoor mounting. The backplate is composed of passivated aluminum with white powdercoat.

For more information contact:

Trango Systems

9939 Via Pasar · San Diego, CA 92126

Phone: (858) 653-3900 • Fax: (858) 621-2725

trango@trangosys.com • <http://www.trangosys.com/>